


dipCore32

A reduced Core for your MIDIBox App, an STM32F405RG on a DIP40 board size.

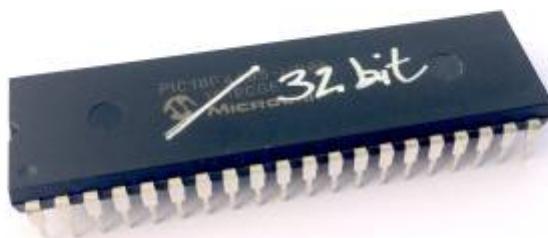

Features

- MIOS32 uses same processor family and drivers(no deep change).
- Same internal hardware as Disco or wCore (speed, memory, peripherals, etc...) .
😎
- Board pinout and package compatible with a MIOS8 PIC
- USB connector onboard.
- 5V power input and led.
- 3.3V regulator and led on board.
- 74HCT541 on board for the 5V output ports.
- User and Reset buttons.
- 2 user leds.
- 8 extra pins for USB, buttons and leds.
- Your favorite Core is now a current component easy to integrate.


All commons MIOS32 ports are available except:

- General purpose J10x ports were removed.
- LCD port was reduced to a serial one, no more pins J15.D0-D7
- 2 UART only(2 MIDI In/2Out).
- 2 AIN channels only(e.g. pedal inputs)




Check the [dipBoard](#) for more details

PCB

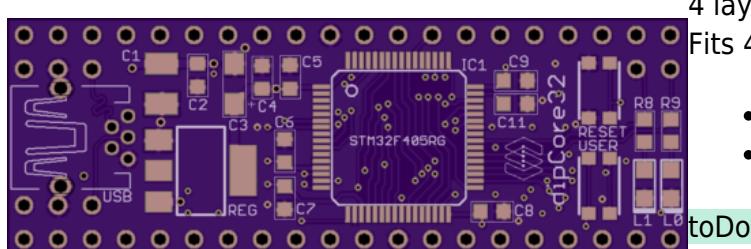


4 layers PCB design.
Fits 4 layer mostly common design rules.


- min. drill 10mil
- min. width 6mil

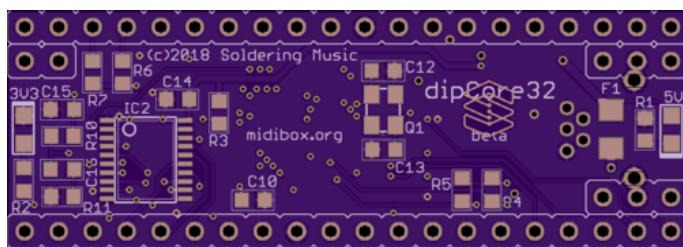


Top copper

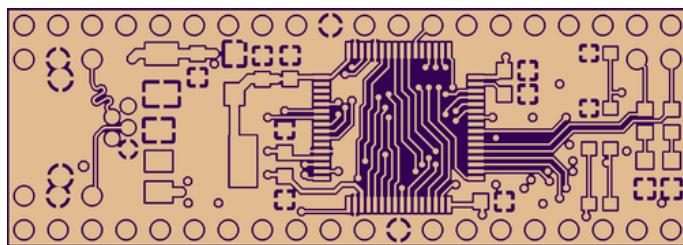


Internal 1

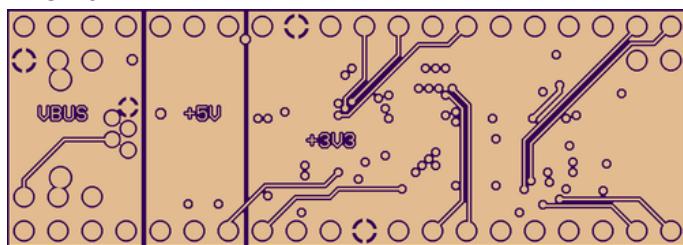

Internal 2

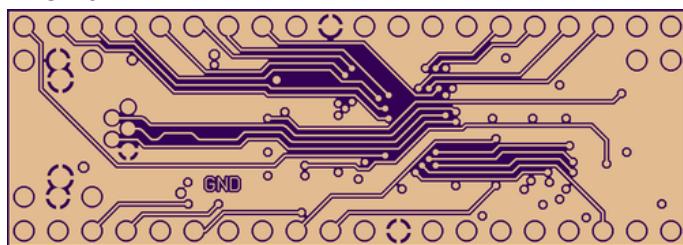

Bottom

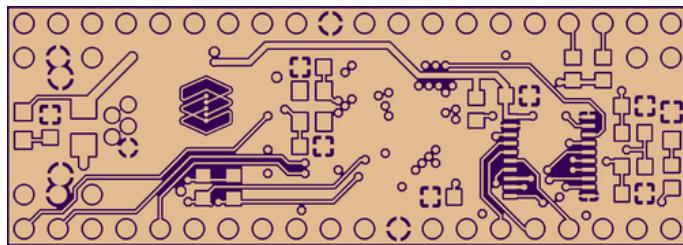


Pinout

First, was a chart.

This chart gives you the equivalence between the different pinout and functions.


PIC / MIOS8			STM32F4 / MIOS32							
DIP40	MIOS8 Function		dipCoreF4			DISCO / wCore			Discovery F4 Pin	Pin name
			DIP40	LQFP64	STM32 F415RG	MOS32 Function	LQFP100	STM32F 407VG		
2	J5 RA0		2	14	GPIO	USER BUTT	23	USER BUTT	P1.12	PA0(s)-WKUP(s)
3	J5 RA1		3	58	I2C1_SCL	J4B.SC	92	I2C1_SCL	P2.23	PB6
4	J5 RA2		4	59	I2C1_SDA	J4B.SD	93	USART1_RX	P2.24	PB7
5	J5 RA3		5	17	USART2_RX	J11.MI1	26	USART2_RX	P1.13	PA3(s)
6	J5 RA4		6	16	USART2_TX	J11.MO1	25	USART2_TX	P1.14	PA2(s)
7	J5 RA5		7	15	ADC12_IN1	J5.A0	24	ADC12_IN1	P1.11	PA1(s)
8	J5 RE0		8	25	ADC12_IN15	J5.A1	34	ADC12_IN15	P1.19	PC5(s)
9	J5 RE1		9	40	SP3_RC2(GPIO)	J19.RC2	66	LCD:SER/E2	P2.46	PC9
10	J5 RE2		10	26	SPI2_RC2(GPIO)	J8/9.RC2	35	ADC12_IN8	P1.22	PB0(s)
13	OSC1		13	46	JTMS-SWDIO		72	JTMS-SWDIO	P2.42	PA13
14	OSC2		14	49	JTCK-SWCLK		76	JTCK-SWCLK	P2.39	PA14
15	J6/7_RC		15	50	SPI3_RC1(NSS)	J19.RC1	77	SPI3_NSS:RC1	P2.40	PA15
16	J6/7_SC		16	55	SPI3_SCK	J19.SC	89	SPI3_SCK	P2.28	PB3
17	J6/7_SO		17	57	SPI3_MOSI	J19.SO	91	SPI3_MOSI	P2.26	PB5
18	J6/7_SI		18	56	SPI3_MISO	J19.SI	90	SPI3_MISO	P2.25	PB4
19	J8/9_SO		19	11	SPI2_MOSI	J8/9.SO	18	N.U.	P1.9	PC3(s)
20	J8/9_SI		20	10	SPI2_MISO	J8/9.SI	17	ADC12_IN12	P1.10	PC2(s)
21	J8/9_RC		21	27	SPI2_RC1(GPIO)	J8/9.RC1	36	ADC12_IN9	P1.21	PB1(s)
22	J8/9_SC J10_SC		22	34	SPI2_SCK	J8/9.SC	52	SPI2_SCK	P1.37	PB13
23	J10_RC		23	30	I2C2_SDA	J4A.SC	48	I2C2_SDA	P1.35	PB11
24	J10_SO		24	29	I2C2_SCL	J4A.SD	47	I2C2_SCL	P1.34	PB10
25	J11_TX		25	51	UART4_TX	J11.MD2	78	DAC_CK(discovery)	P2.37	PC10
26	J11_RX		26	52	UART4_RX	J11.MI2	79	LCD:SER/RW	P2.38	PC11
27	J14		27	8	GPIO	J15.CS2	15	OTG_FS_EN	P1.8	PC0(s)
28	J15_RS J10_MD		28	54	GPIO	J15.DC	83	UART5_RX	P2.34	PD2
29	J15_Rw J10_MO		29	53	GPIO	J15.SDA	80	UART5_TX	P2.35	PC12
30	J15_E		30	9	GPIO	J15.SCL	16	ADC12_IN11	P1.7	PC1(s)
33	J15_D0		33	33	GPIO	J15.CS1	51	SPI2_NSS:RC1	P1.36	PB12
34	J15_D1		34	24	SPI1_RC2(GPIO)	J16.RC2	33	ADC12_IN14	P1.20	PC4(s)
35	J15_D2		35	62	CAN1_TX	J18.TX	96	I2C1_SDA	P2.20	PB9
36	J15_D3		36	61	CAN1_RX	J18.RX	95	SP3_RC2	P2.19	PB8
37	J15_D4		37	20	SPI1_RC1(NSS)	J16.RC1	29	ADC12_IN4	P1.16	PA4(s)
38	J15_D5		38	21	SPI1_SCK	J16.SC	30	SPI1_SCK	P1.15	PA5(s)
39	J15_D6		39	22	SPI1_MISO	J16.SI	32	SPI1_MOSI	P1.17	PA7(s)
40	J15_D7		40	23	SPI1_MOSI	J16.SO	31	SPI1_MISO	P1.18	PA6(s)
			41	43	OTG_FS_ID	J1.ID1	69	OTG_FS_ID	P2.41	PA10
			43	45	OTG_FS_DP	J1.DP1	71	OTG_FS_DP	CN5(USB)	PA12
			44	35	OTG_HS_DM	J1.DM2	53	SPI2_MISO	P1.38	PB14
			45	36	OTG_HS_DP	J1.DP2	54	SPI2_MOSI	P1.39	PB15
			46	42	OTG_FS_VBUS	J1.VBUS	68	OTG_FS_VBUS	P2.44	PA9
			48	44	OTG_FS_DM	J1.DM1	70	OTG_FS_DM	CN5(USB)	PA11
			49	3	OTG_HS_OC	J1.OC2	8	J10/D9	P2.9	PC14(s)-OSC32_IN(s)
			50	4	OTG_HS_EN	J1.EN2	9	J10/D10	P2.10	PC15(s)-OSC32_OUT(s)
			51	38	LED BLUE	LED.2	64	DAC_MCK(discovery)	P2.48	PC7
			52	37	LED RED	LED.1	63	USART6_TX	P2.47	PC6
			2		N.U.		7	J10/D8	P2.12	PC13(s)
			5		OSC_IN		12	N.U.	P2.7	PH0(s)-OSC_IN
			6		OSC_OUT		13	N.U.	P2.8	PH1(s)-OSC_OUT
			28		N.U.		37	SPI1_RC1	P1.24	PB2
			39		N.U.		65	LCD:SER/E1	P2.45	PC8
			41		N.U.		67	LCD:RS	P2.43	PA8



xls chart

The dipCore32 and the legacy MIOS32 ports.

Check [dipBoard32](#) for more details about the connectors.

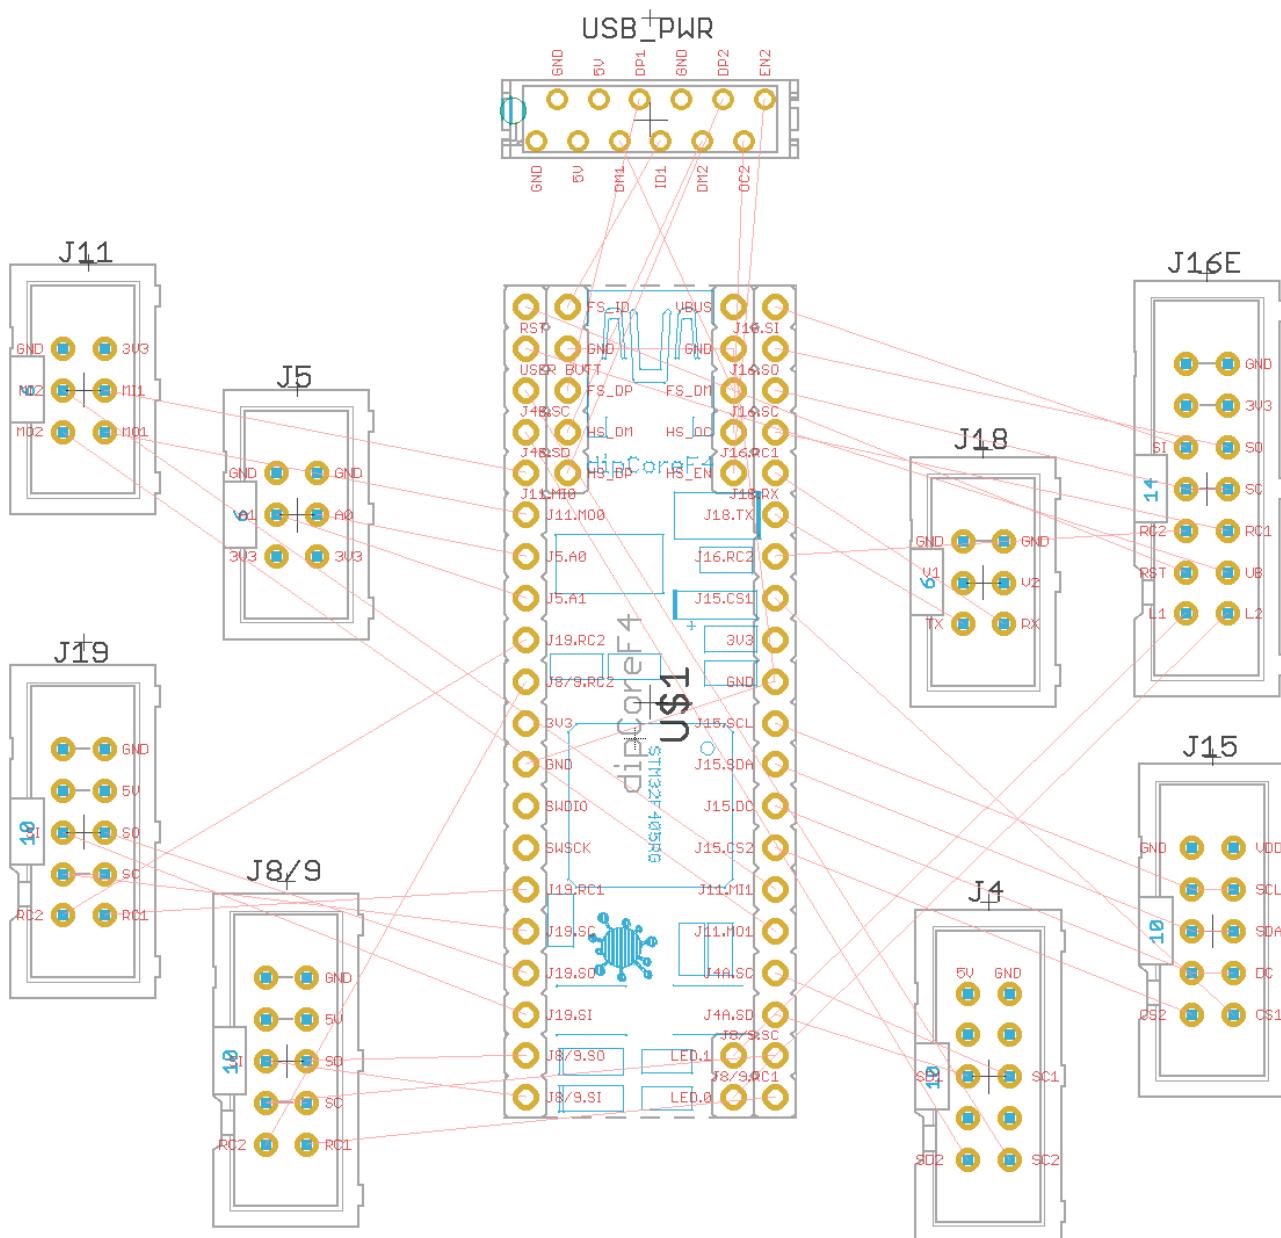

ToDo

-- ===== STM32F407VG vs 405RG ===== == Legacy STM32F407 and 405 share the same characteristics. ==

Compare Attributes		
	STM32F405RG	STM32F407VG
Description	High-performance foundation line, ARM Cortex-M4 core with DSP and FPU, 1 Mbyte Flash, 168 MHz CPU, ART Accelerator	High-performance foundation line, ARM Cortex-M4 core with DSP and FPU, 1 Mbyte Flash, 168 MHz CPU, ART Accelerator, Ethernet, FSMC
Package	LQFP 64 10x10x1.4	LQFP 100 14x14x1.4
Core	Arm Cortex-M4	Arm Cortex-M4
Operating Frequency (MHz) (Processor speed)	168	168
Co-Processor type	-	-
Co-Processor frequency (MHz) (max)	-	-
FLASH Size (kB) (Prog)	1024	1024
Data E2PROM (B) (nom)	-	-
RAM Size (kB)	192	192
Timers (typ) (16 bit)	12	12
Timers (typ) (32 bit)	2	2
Other timer functions	2 x WDG, 24-bit down counter, RTC	2 x WDG, 24-bit down counter, RTC
A/D Converters (12-bit channels)	16	16
A/D Converters (16-bit channels)	-	-
D/A Converters (typ) (12 bit)	2	2
Comparator	-	-
IOs (High Current)	51	82
Display controller	-	-
CAN (typ)	2	2
CAN FD (typ)	-	-
I2C (typ)	3	3
SPI (typ)	3	3
I2S (typ)	2	2
USB Type	USB OTG FS + USB OTG FS/HS	USB OTG FS + USB OTG FS/HS
USART (typ)	4	4
UART (typ)	2	2
Connectivity supported	-	-
Integrated op-amps	-	-
Additional Serial Interfaces	-	Ethernet
Parallel Interfaces	FSMC, SD/MMC	FSMC, SD/MMC
Crypto-HASH	-	-
TRNG (typ)	true	true
SMPs	-	-
Supply Voltage (V) (min)	1.8	1.8
Supply Voltage (V) (max)	3.6	3.6
Supply Current (μA) (typ) (Lowest power mode)	1.7	1.7
Supply Current (μA) (typ) (Run mode (per MHz))	215	215
Operating Temperature (°C) (min)	-40	-40
Operating Temperature (°C) (max)	105	105
A/D Converters (typ)	-	-
Number of Channels (typ)	-	-
A/D Converters (typ)	-	-
Number of Channels (typ)	-	-

The 405RG is a TQFP64, a 10x10mm package and only 64 pins.

No Ethernet MAC and camera interface.

ST STM32F4xx series

==== In MIOS32 === We use the same peripheral drivers same family, some compilation defined

conditions were added for the specific pinout and type, number of ports. [ToDo](#)

From:
<http://wiki.midibox.org/> - **MIDIbox**



Permanent link:
<http://wiki.midibox.org/doku.php?id=dipcore32&rev=1535633054>

Last update: **2018/08/30 12:44**