# KiCAD, An Open-Source Alternative to Eagle for PCB Design

#### 1. Introduction

KiCAD is a Open Source Computer Assisted Drawing (CAD) software for designing Printed Circuit Boards (PCBs) from Schematics to Gerber Files. Its features have been enhanced through heavy development by CERN and the community. It supports up to 32 layers and has no limitation on the size of the PCB.

You can find the official website here : http://kicad-pcb.org/

## 2. Installation

First, download the correct installer for your operating system at

http://kicad-pcb.org/download/

Follow the instructions to get the program installed

## 3. Getting Started

The basic workflow in Kicad is split into 4 parts :

• First you have to create a library including all the components you will need for your design. This allow to add new components to a basic library by designing pin layout for a new used IC.

Last update:	2016/07/18	00:30
--------------	------------	-------

kicad


80	Com	ponen	t Library	Editor	/home/h	yvok/Docu	ments/El	ectron	ics/kic	ad_lib	os/ardu	ino_p	ro_min	i.lib						
C9	Φŝ	1	1	# 🚯	<b>10</b> ()	ا\$1 🕤	50	8	Т	*	•	٩ (	P P	6.2				• APM		*
																	· · · · ·			
$\stackrel{\mathrm{In}}{\longleftrightarrow}$										::										0 <mark>8</mark>
$\stackrel{\rm mm}{\longleftrightarrow}$								:: P	17 · · ·			: : :								Т
12							- 1		ТХD	19	RAW	21								
							<u>, 2</u>		RXD	1.1	GND	23	5							$\odot$
							3	1.1	RST	83	RST	22	2							5
							4		GND	1.1	Vcc	21								2
							5		GND			20	ີ່							\$
									2		A3									-
							- 6		3	1	A2	· 19								ĕ
							. 7		4	-6	A1	18	<u> </u>							
							<u>8 s</u>		5	11	AO	17	<u>/                                     </u>							.01
							<u> </u>	1.1	6		ск	16	5							
							_ 1(	5	7	1.1	iso	15	5							
							1					14								
							•	2	8	1 1 M	IOSI	13								
									9	11	10									
										11	APM									
						<u>.</u>				11										
Part APN			Unit A	Body Norma	Tyj I Co	pe mponent	Descrip	tion	Key	word	is c	atash	eet							
									Z 4	X 0	.100 Y	0.200		dx 0.100	dy 0.200	d 0.224		Inches	Add pin	

• Then you have to create a Schematic, which is the Conceptual Drawing of your electronic design. It's how components are connected together.

80	0	[a	qua	riu	m_	ligl	ht_	_rt	c_t	:im	er	Ŋ	V	ho	me	:/h	yv	ok,	/D	oci										<u> </u>			igh																		
R	ł			÷		٢	(	X		1		Ċ		5		Ì		Q	] [	9	]	€		Q	. (	3	ſ	R	E		Q	Ð	Q	] {	2402	1	X	.n	et	BON		1	ĥ	2	BACK						
																																							. +	y İ				· · · ·							5
Å																																					-		_	C1	L		(				· ·				12
₩m					•																																÷			10	)0n			R1.							888
																																			U1		-#		5	7			. L								ŝ
<b>∛</b>	· ·									SI	+I E	ÉLÓ	51					•				ÅR			:					Г		•	19		Do	ut	ýr.	Ľ,	NT/	SQ\	~	5					· ·				5
	• •																			ND3	3  -	GN 1	03	-0	•	Þ			· ·			•	20		DÌr					2 k Ĥ		<u>3</u>	5	 P	•	•	 			-	Ē
							<u>RS</u>		R	ST										13 12 14	2  -	1 1	2 1	•						_			18		sc sc					Vba	ť										k
			 	0-		<u> </u>	3V. 5V	0	1.11	V3										10		1	0	-0								•	1	-0	CS PE												 			1	×
			• •	1—	•	Į G	<u>5ND</u> 5ND V_11	2	G	ND ND										-8	3 -	<u> </u>	<u>3</u>	-0											Re	SPC								 1 4			 			1	+
	• •		- X 	<del>о_</del>	•		AD			_IN DD			· ·	· ·							5	e	5	-0		•		: - W	20			•	•				UND						2032	$\left( \begin{array}{c} \\ - \end{array} \right)$	<u>+</u> _	)Ë		•		-	▲ ▲
							AD: AD:	2	A	D1 D2												2	+ 3							$\frac{1}{2}$		BUCK					S	- D	s3	23	4 .		۲ ۲	N	F					<b>-</b> -	
				•			AD: AD4	4	A	D3 D4											2	1	2	•			]		Ļ.	<u>3</u> E	1.	- <b>H</b>						-			•				<b>)</b> .		 				Ū
						• <u> </u>	AD:	<u>.</u>	A	D5		 Al	RD		NC	I_S		Eli	D	- (				-0				•	• •	•	•	•			-	•	×		•		•	•	•		•	•	· ·				<b>%</b>
			V	cc	cjor	; ne	; 5	ţhi	τοι	igh	į t	he	: ə	ird	uir	סר	bŗ	bajr	d,	at	lta	c þ	ed	te	i a a	i s	uit	; jab	le	po	we	ег) з	sup	ply	e (i	/cc	>	i L	ËD	s f	οίν	var	d v	, olt	age	i z i	ņ ta	stal	5 I 1)	-	
																					•		•									•															 				****
	Reference Name Component Library Description Keywords																																																		
U? File /	hom	ne/h		DS k/C			en			234 ect		nic	s//			323 riur		ligh	nt_	tZ	Z 6		_	X	5.8	00	Y	2.2	50		_		dx !	5.8	00	dy	2.2	50	d e	5.22	21		_	_	Inc	hes	, [	Ado	d cor	mpo	oner

• After this you will have to make a link between components and footprints. Footprints are the layouts of pads, holes, and silkscreen drawings that are actually manufactured into the PCB, corresponding to each component.

3/5

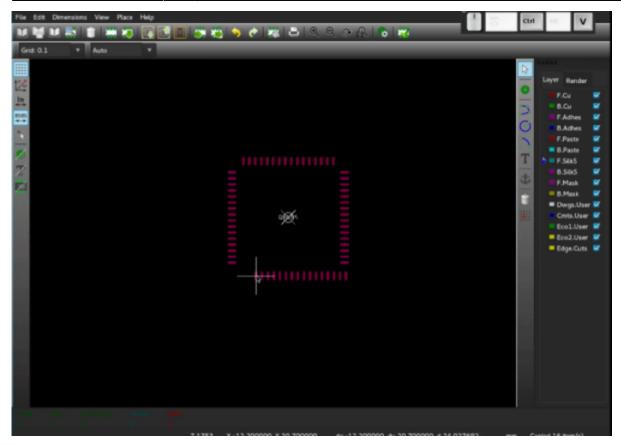


• Lastly, the PCB Design by itself. Based upon your components list and associated footprints , you can create the PCB by placing footprints at the right place and make routing between them (which is connecting components footprints by making copper paths). You can also use the famous 3D viewer to see a simulation of the result.

<ul> <li>Applications Places System 20 ?</li> <li>/usr/local/kicad/share/demos/test_xil_95108/carte_test.brd</li> <li>File Edit View Place Preferences Design Rules Help</li> </ul>	ूर्ज 💉 📢 🖂 Thu Apr 7, 1:35 AM 🔍 terry 🖰 📔
□ □ □ □ □ ○ □ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○	
Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and a constraint       Image: All and a constraint     Image: All and a constraint     Image: All and	Start USR       Start USR         WR       Difference         Difference       Difference<
dx 0.00 dy 0.00 View: 23.0	

Once your PCB Design is finished, you can export it to Gerber Files (Vectorized layers) and send it to

your favorite PCB maker.

#### 4. Video Tutorials

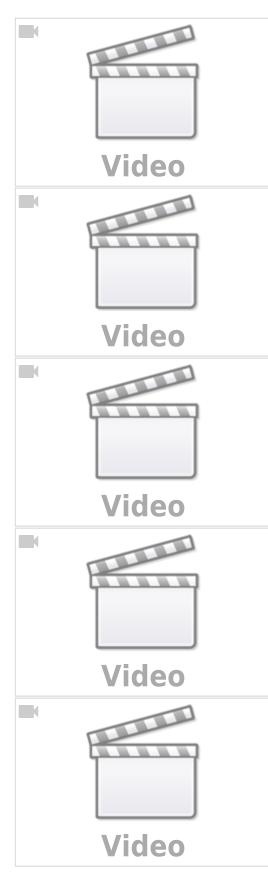

• Further Video Tutorials

#### 5. Going Further

- KiCAD Getting started Manual
- KiCAD Librairies

## 6.Tips

#### Issues with default libraries

#### Symbols

While the libraries are all right for some purposes, there's an issue with many of the symbols for chips. Often these symbols have hidden power pins labeled VDD and GND, or similar. KiCAD automatically connects these together, which is bad if you want them connected to a net named something else, and even worse if there is a net with one of these names which you DON'T want connected to these pins. In addition, the naming conventions on chip pins isn't consistent, and often the chip bodies are needlessly large. Therefore, it is recommended to consider copying and editing a built-in symbol.

#### Footprints

Many of the footprints are just fine, though some are missing 3D models. However, some common footprints, like standard types for TO-92 transistors, are missing-you will have to create them.

From: http://wiki.midibox.org/ - **MIDIbox** 

Permanent link: http://wiki.midibox.org/doku.php?id=kicad&rev=1468801858



Last update: 2016/07/18 00:30