

MSQ-CC-BCR

MotionSeQuencer for ControlChanges for BCR2000 by wiring it to MBHP
Synth-Patch-Editor & Motion-Sequencer 4 ControlChange (= CC-Automation)





Video

Introduction

Controls and automate my Nord Drum2 [NORD DRUM 2](#)

Realized by connect a BlackBox between Sequencer & Synthesizer

This Box is called MSQ_CC_BCR: **M**otion **S**equencer for Midi**C**ontrol**C**hange controlled via a **BCR**2000 Midicontroller

It acts as:

- **Midi Merger** NTE,CLK,PC merge with CC... & CCinput is a thing between MSQ_CC_BCR and BCR only since we have intelligent UI with Pages
- **Patch Manager** it replaces the Synths internal Patch Storage, each PC Number from your Sequencer is added by the BANK CC (CC 32), where each Nr is ADD 128 PC Numbers more...
- **Motion Sequencer** Record your Controller Movements in a Sequence in 32th Resulution @ maximal 256 Steps length

Features

- **Remote your Synths** by: 8x Midichannels with up to 32x Control Change (CC)
For the BCR i only can provide 8x29, because i need some controlls to control the MB Program itself
- **Save the Patches** and dump it to Synth
- **Load hundrets of Patches** via received Program Change + the Bank-CC (CC32)
- **Save Patches** vie CC24 + CC value 0-127... when sending before a BankCC32 you can expand that to 128x128 patches
- **Record CC-Motion-Sequences** use a footpedal connected to FSW1 on the backside of the BCR, to ARM/Disarm it... so you can tweedle 2 ore more CC @ once... but you dont have to, BCR-onboard is also a Button for it
- **PLAY Motions-Sequences** up to 256 steps @ 32th rate - **VELOCITY MORPH** Add Velocity-Ammount to CCs

- **MERGE** incoming Midi-Notes/Clock/Pitchbend with Automated CCs
- **Set Sequencer Beatstructure** - how to interpret Clock-ticks (4/4, 5/4, 6/4, 7/4...) - CC23
- **Global Page**: for example you use 8 similar Drum-Voices, with the Global you have 8 channel strips with dedicated Controls, for example:
8xVolume, 8xTone/Noise-Mix, 8xDistortion, 8xClock
- if you have one Synth over 2xMSQ_CC_BCR Tracks(boot set to MidiChannel 0, to get 64CCs instead of 32), then the Global Page: have the ability to show/edit a parameter from Track1Voice on Track1Global, and from Track2Voice on Track2Global... it depends how you set the Midichannel in the Systemsettings (which are hardcoded)
- Many of these features, especially the **System Settings** would need a UI, but that would make it bigger, more expensive, and maybe more complex to use... it is set once, for one multipart-synth+bcr2000, MSQ_CC_BCR do all the Preset Store, and Automations, so it is one Unit > to use the Unit in another way would make all the Patches (128x128 patches) useless, so once done, it is a black box loaded via Programchange! ... minimal is better here, there will be other **MSQs** out there, be prepared for the MSQ_CC_2xLRE & MSQ_CC_ELO

Hardware Requirements

External Requirement:(for example)

- Melody/Clock Source with ProgramChange-Output: [midibox_seq_v4l](#) oops that don't do PC...
- Melody/Clock Destination: NordDrum 2
- Midicontroller: 1x BCR2000


Midibox:

- [core32](#)
- [1xMidi IO](#) connect 1 midicontroller and 1 Note/Clock-Source/Destination
- SD-Card, formatted with FAT32, and the file "bcr1.syx" on it
- Soldering Iron, Wires, PCB....
- USB Power Supply... I tried to use the Midi-BUS-Power from BCR2000 but it is too weak!

Visual Feedback directly from MBHP

- a Momentary Switch Connected to J5A Pin0
- 7 LEDs in serial with 220Ohm each to GND connected to J5A Pin1-3 and J5B Pin0-4

The LEDs show via Gestic (Patterns) if something is wrong, done, busy, & show the Rhythm structure: The Switch switches as Radio-Button thru the Rhythm Structures (4/4, 5/4...), the LED-Indicating this. By Holding the Switch and Powering the Core, it will Dump Out a Sysex Template to your BCR.

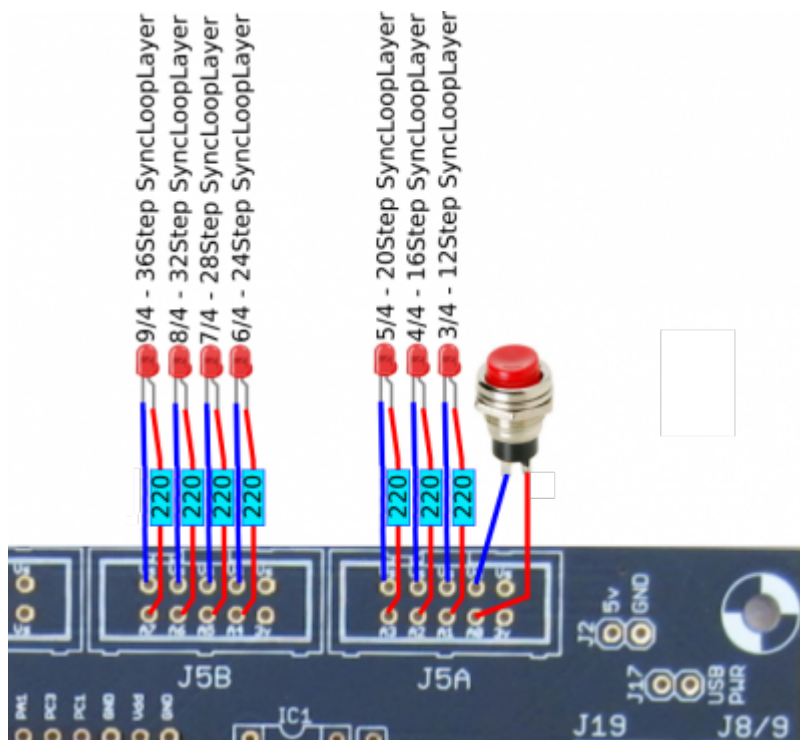

Why BCR2000

because I have 3 of them but they are too old dirty, damaged... i can't get a good price for it, so better hold it and make something with it.

Setting up a BCR2000

Cabeling

MidilIO PortA Out >> BCR Midi IN

AFTER Uploading the Sysex, and restarting the BCR connect:

MidilIO PortA In >> BCR Midi OUT A

Upload the Sysex-Template


1. unpack [msq_cc_bcr_v1.norddrum2.zip](#) and put "bcr1.syx" on a SD-Card (root level)
 2. Put SD-Card into CORE32
 3. bridge J5A Pin0 to ground, or connect a switch to it, that you will need if you want to sequence other song structures then 4/4 (which is default)!
 4. Power the core up.
- ...if the filestructure (patches) are already existent...then it takes less than half a minute to dump the BCR-2000 Layout Data...
- You don't have to save the preset, it will make it automatic
- ...when no filestructure... then it will take a minute or so... the core has to make 256 Patches, since i don't need more (i can only access on my 16x16BLM 16x16 Patches = 256...)\...\ but better:
- * Faking a filestructure: make an empty folder "sq" and put it on SD-Card, make the syx.dump, make

your first simple standart patch, = the sound you will start with...to the next 256 Patches ;) so choose carefully, young jedi... then remove the Card, earse the "s" folder on the card, and put it into the core again, now it will copy your "standart patch" to 256 others

Frontpanels

BCR2000 Stickers

The Blue Elements are the MBHP Remotes... the Rest is for the Synth

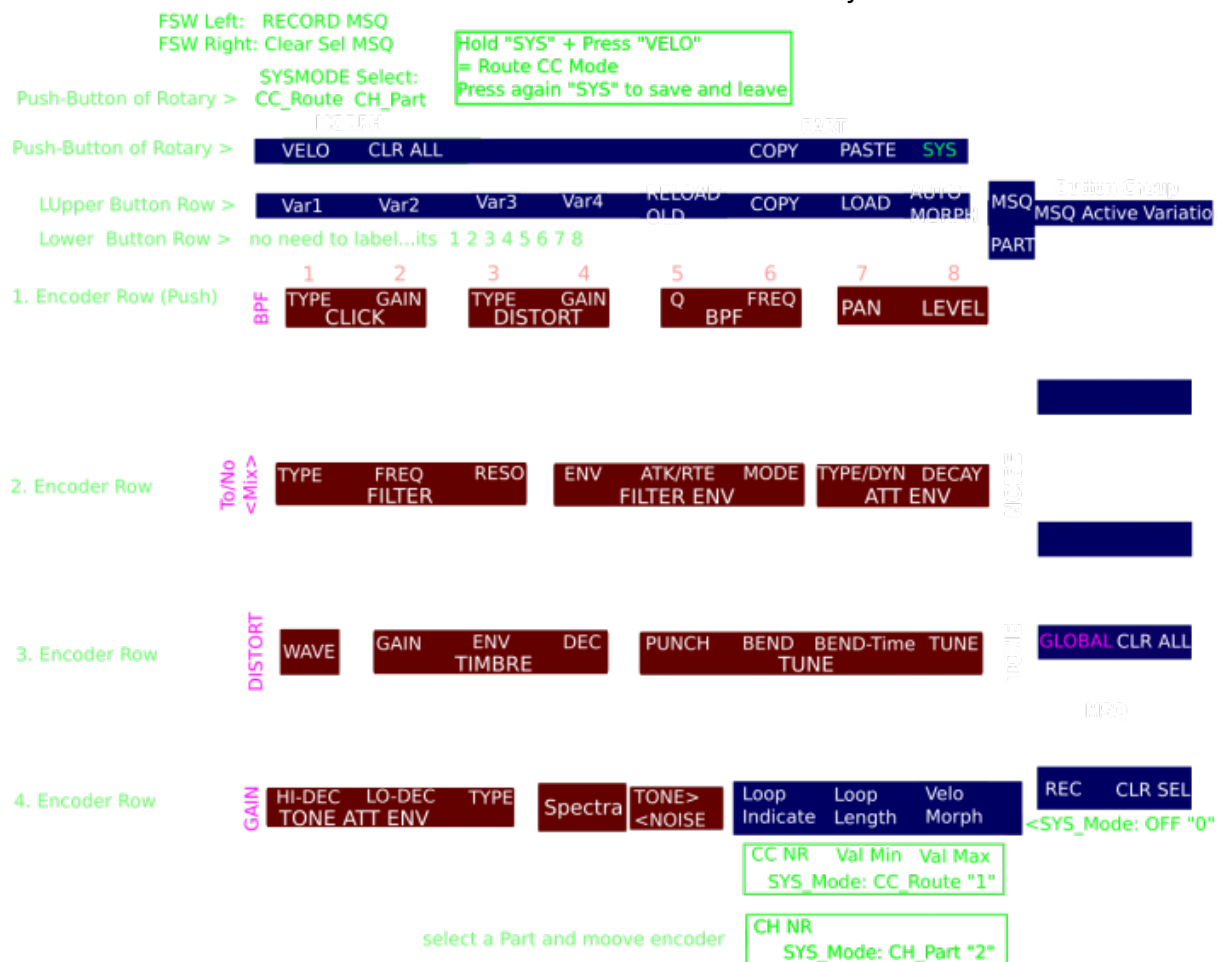

UNTESTET, NOT SCALED!!!!

In Order to better understand the Routing of the Internal CCs to externals:


CC Routing to Synths

MSQ_CC_BCR internal i have 8×32 CCs, they are always identical.

but with a simple input output matrix i can decide which CC it gets in real world.

each of the 8 Part can have midichannle 0-15...

So we talking about Mapping... in the moment it is made in the source code with a simple array.

this array could be saved and loadet from SD-Card aka "SYS settings", and this array could be editet by a simple editor...  i dont have a glue about this, nor time no interest in doing this...

the format of this setting is simple, the file starts with (converted from hex) mq04 and then the Routing array starts [32][127] for those how know how to program a simple interface for it?

To Do

Nothing it is done!

maybe scale min max values for CC: for example different synths have only 0-3value instead of 0-127, by different functions like WAVEFORM...) - this will be interesting when using other synths then nord drum...

Resources

[BCR-Manual](#)

[BCR-SYSEX-GUIDE](#)

[TOKEN-Reference](#)

[BC-Convert](#) Convert SYX into Textfile to Edit and reverse... better then every BCR Editor! But Windows only... i run a oracle virtualbox with a VM-W7 under Linux, with a shared folder

Community users working on it

- **Phatline** = Programming, Documentation...

Just let a Private message on the forum to user already involved, the sourcecode is includet in the firmware .zip!!!

From:

<http://www.midibox.org/dokuwiki/> - **MIDIbox**

Permanent link:

<http://www.midibox.org/dokuwiki/doku.php?id=msq-cc-bcr>

Last update: **2018/02/17 02:52**

