16th fixed PolySequencer





beta in action - youtube

Specs ?

4 Midi-Channels: 1 2 3 4
–2 Tracks a Channel
–8 Notes-Chord a Track
–each track has a dedicated and changeable loop-length from 16 to 512 Steps (example for 4-4)
–each Track can played single and booth tracks can be played simultan/in-dual
–each Track record/playback PitchBend, the right one of a Track-Couple is the Pitchbend we hear
–when the right one is muted & the left track is unmuted = the left tracks PitchBend is what we hear...
–so you could play a chord @left-track, and while you record or play new notes left or right, both notes getting PitchBended by the right tracks Pitchbend

Fixed Velocity @ 127
–no Keyboard-Velocity-sense (Triggermatrix does the job of sensing drum trigger in order to re-trigger the moldy buffer

16th fixed note-trigger-rate
–puts out note-data in 16rate (in order to provide a steady note stream for Triggermatrix)
–a connected Triggermatrix (allows not only 4-4, all other things like 5-4 are possible!)
–Triggermatrix does the job of melody-rythm-re-triggering}

512 Songs saved on SD-Card
–Load-able while playing - when the beat-structure is the same

the Midi-System-Setup

–fixed/hardcoded (Midi-Ports, Midi-Channels))

MidiPort 32-in:


–Midi-Clock-Source, Start-Stop, ProgramChange @ MidiChannel 1


MidiPort 33-in:
–connected to a Midikeyboard @ MidiChannel 1

MidiPort 33-out:
–connected to Triggermatrix -Melody-In-Port, or a poly-synth)

Footboard-Interface

- Footboard/old Pulp-Radio-like wiring!
- 2×8 Foot-Tactial-Buttons + 2xBank-Tactial-Buttons
- 2×8 LEDs to Display Foot-Buttons-Status
- 2×4 Bank indication Leds
- 2x Foot-Tactial-Button-Banks
- CORE32 STM32F4
- 3x LCD with 2x40-Signs, to display Chord-Notes, for sequenced notes and keyboard-inut-notes
- 2x Midi IO
- 8x 15Led-LedRings
- 2x DoutX4 Modules
- 1x DinX4 Modules
- cables, isolaton material, solder
- wood, Screws, Drills, Drilling-Machine, a saw for the Display-Cut-Outsl, a Fill
- M3 Distance-Stamps to mount the pcps
- SD-Card

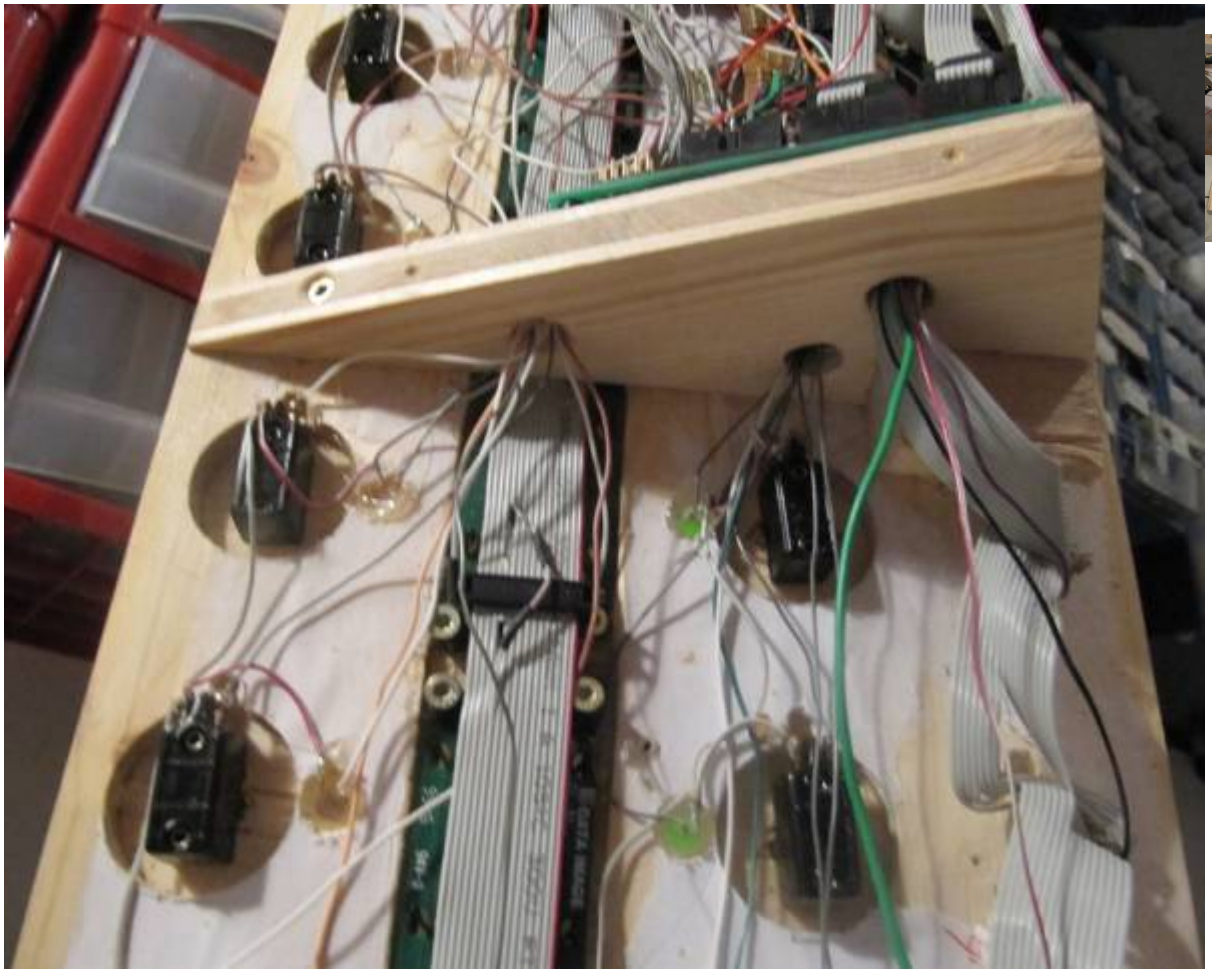



Code - C and HEX

so when you have those things, upload the Code

fabricated PCB-Version

not planed!

Community users working on it

- **Phatline** = Programming, Documentation, Hardware-Prototype

Getting Involved ?

Just let a Private message on the forum to user already involved

From:
https://wiki.midibox.org/ - **MIDIbox**

Permanent link:
https://wiki.midibox.org/doku.php?id=16th_fixed_polysequencer&rev=1513632636

Last update: **2017/12/18 21:30**