

MIDIBox AY 3 8912 - ENVELOPE FEATURES

MIDIBox AY 3 8912 - ENVELOPE USER MENU

ENV. PPERIOD	0 to 255
ENV. P.FINE	0 to 255
ENV.SHAPE	0 to 15
ENV.TOGGLE	A B C

...

ENVELOPE ON/OFF TONE A, B and C:

- PRESS **F5** TO VIEW ENVELOPE USER MENU OPTIONS
- Menu item: ENV.TOGGLE: [A, B, C]
- Toggle the ENVELOPE MODE for TONE A, B or C via Key A, B or C
- There will be **ENV.ON** @ Tone A or B or C on the **User Volume Control Menu** instead of the **volume value** if the **ENVELOPE MODE** is activated.
- For Envelope Midi Controller see ⇒ [midibox_ay_3_8912_cc_list](#)

...

::


:

ENVELOPE PERIOD CONTROL:

The AY 3 8912 Chip provide a 16bit Envelope period Control Register.

- Menu item: ENV P. COASE: [0 to 255] (bit 8-15)
- Menu item: ENV P. FINE : [0 to 255] (bit 0-7)

Press [+] or [-] for increase or decrease the **ENV**velope **P**eriod Value

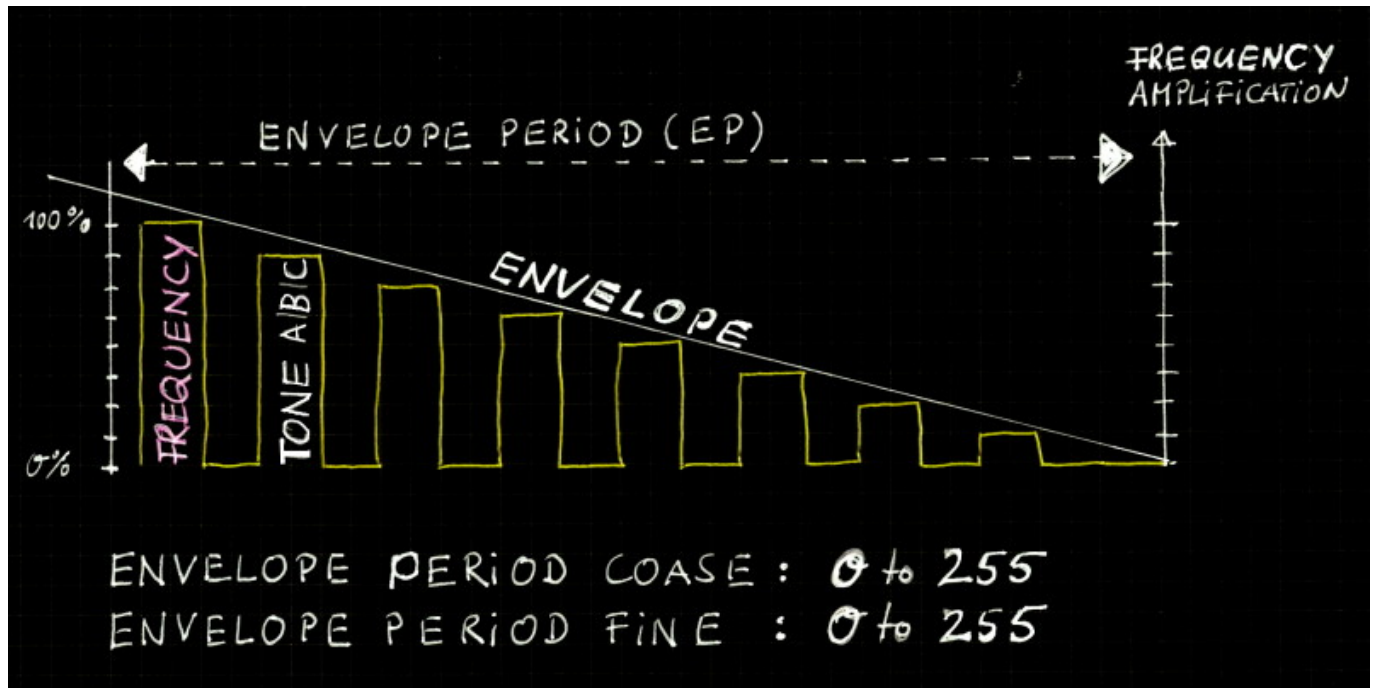

...


..

:

ENVELOPE SHAPE CONTROL:

- Menu item: ENV.SHAPE: [0 to 15]

Press [+] or [-]

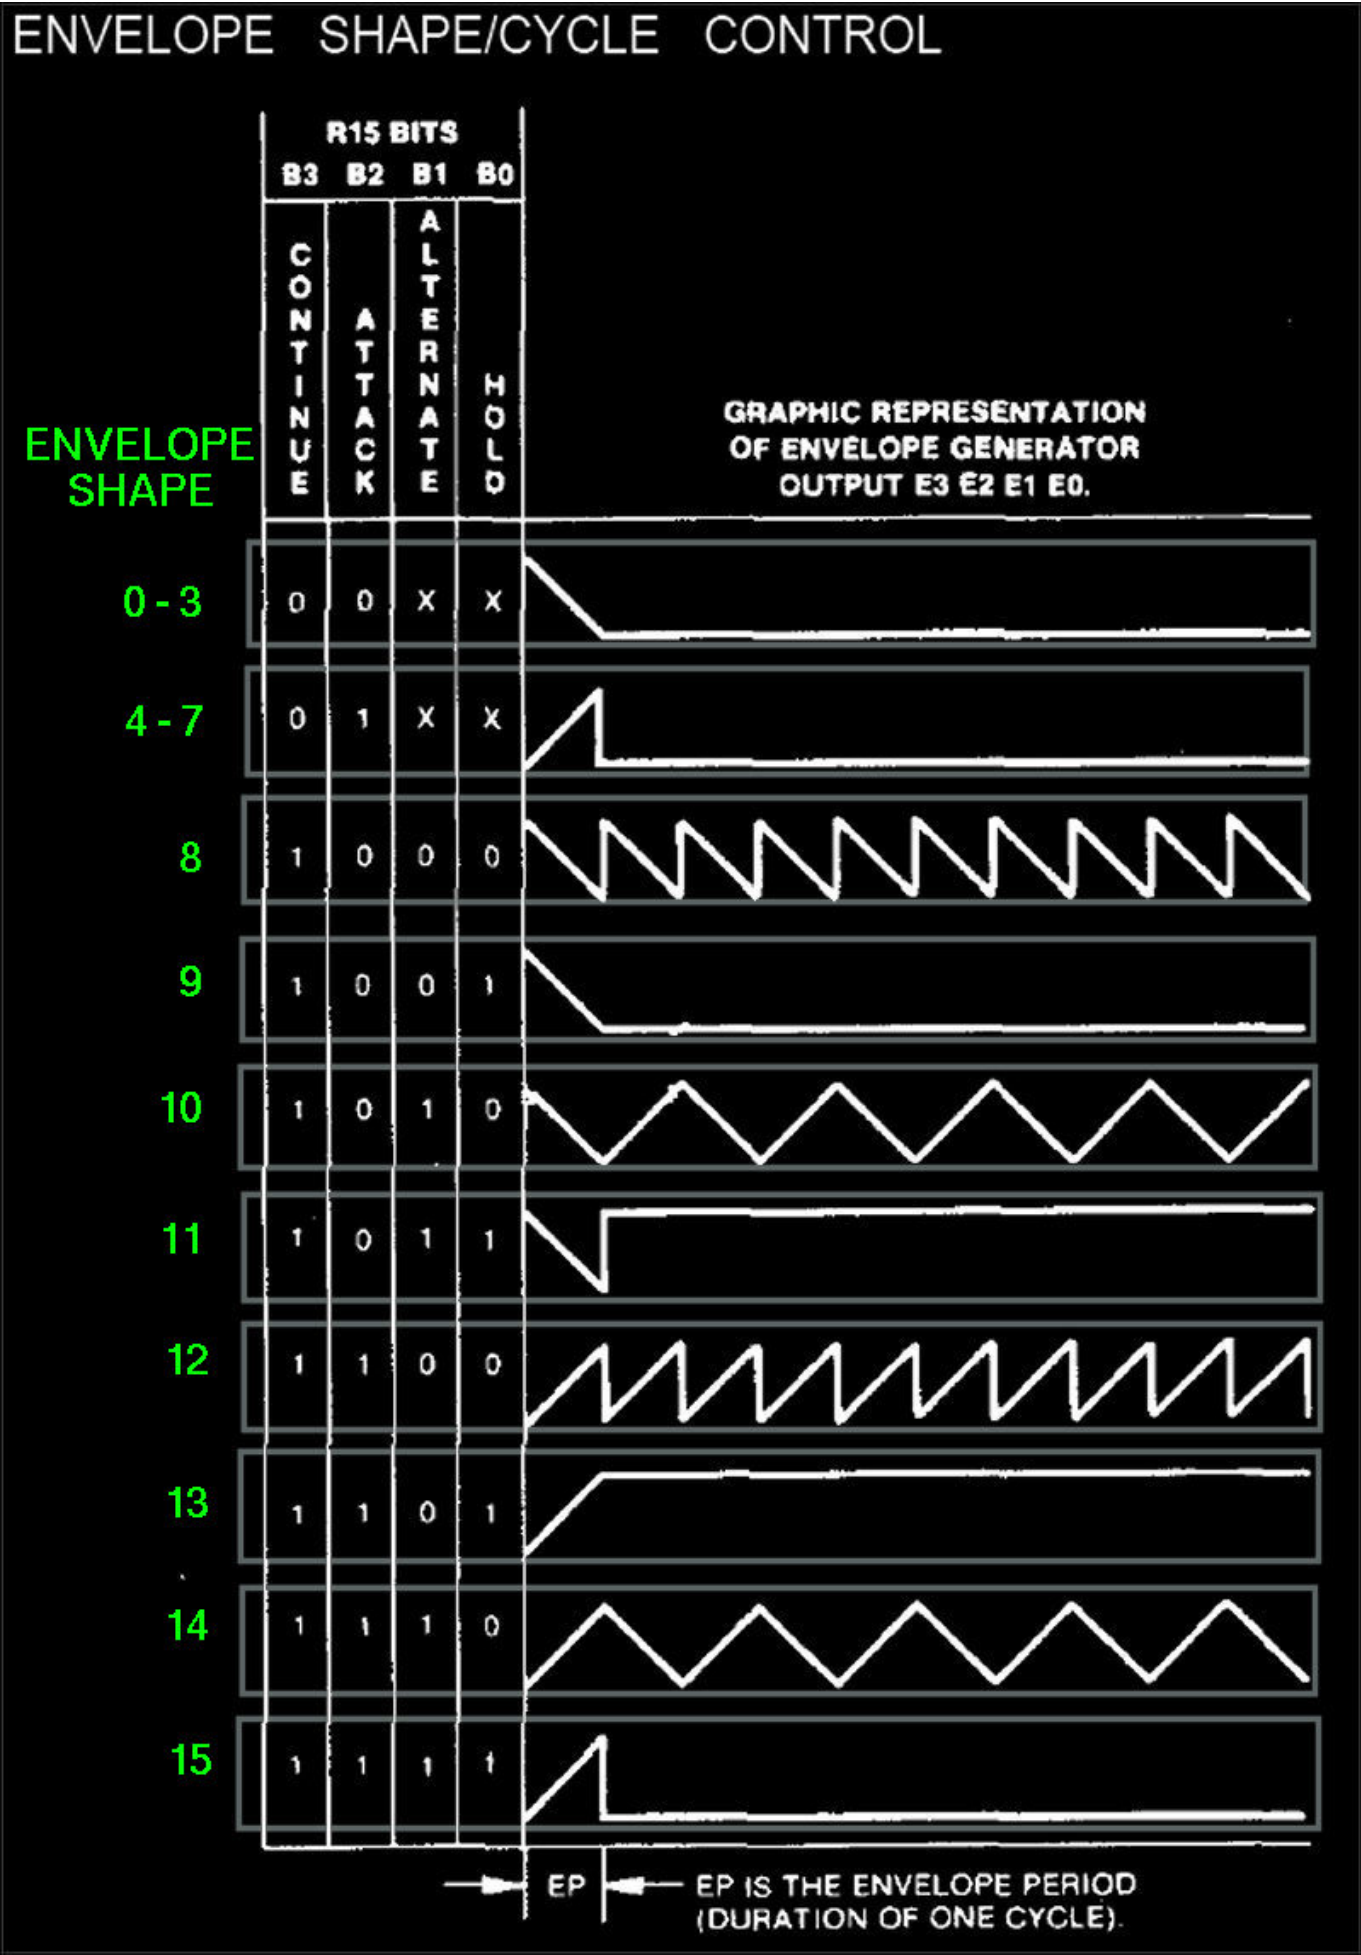

LCD VIEW: SHAPE [**C** ontinue | **A** ttack | **A** lternate | **H** old] [0 to 15]

:::

::

:

[Date: 03.09.2008]

From:

<http://wiki.midibox.org/> - **MIDIbox**

Permanent link:

http://wiki.midibox.org/doku.php?id=midibox_ay_3_8912_envelope&rev=1245517485



Last update: **2009/06/20 18:04**