# MIDIBox AY 3 8912 - ENVELOPE FEATURES

### MIDIBox AY 3 8912 - ENVELOPE USER MENU

| | |
|---|---|
| ENV. PPERIOD | 0 to 255 |
| ENV. P.FINE | 0 to 255 |
| ENV.SHAPE | 0 to 8 |
| ENV.TOGGLE | A B C |

:::

### ENVELOPE ON/OFF TONE A, B and C:

- PRESS **F5** TO VIEW ENVELOPE USER MENU OPTIONS
- Menu item: ENV.TOGGLE: [A, B, C]
- Toggle the ENVELOPE MODE for TONE A, B or C via Key A, B or C
- There will be **ENV.ON** @ Tone A or B or C on the **User Volume Control Menu** instead of the **volume value** if the **ENVELOPE MODE** is activated.
- For Envelope Midi Controller see ⇒ midibox_ay_3_8912_cc_list

:::

::

:

### ENVELOPE PERIOD CONTROL:

The AY 3 8912 Chip provide a 16bit Envelope period Control Register.

- Menu item: ENV P. COASE: [0 to 255] (bit 8-15)
- Menu item: ENV P. FINE : [0 to 255] (bit 0-7 )

Press [+] or [-] for increase or decrease the **ENV**elope **P**eriod Value

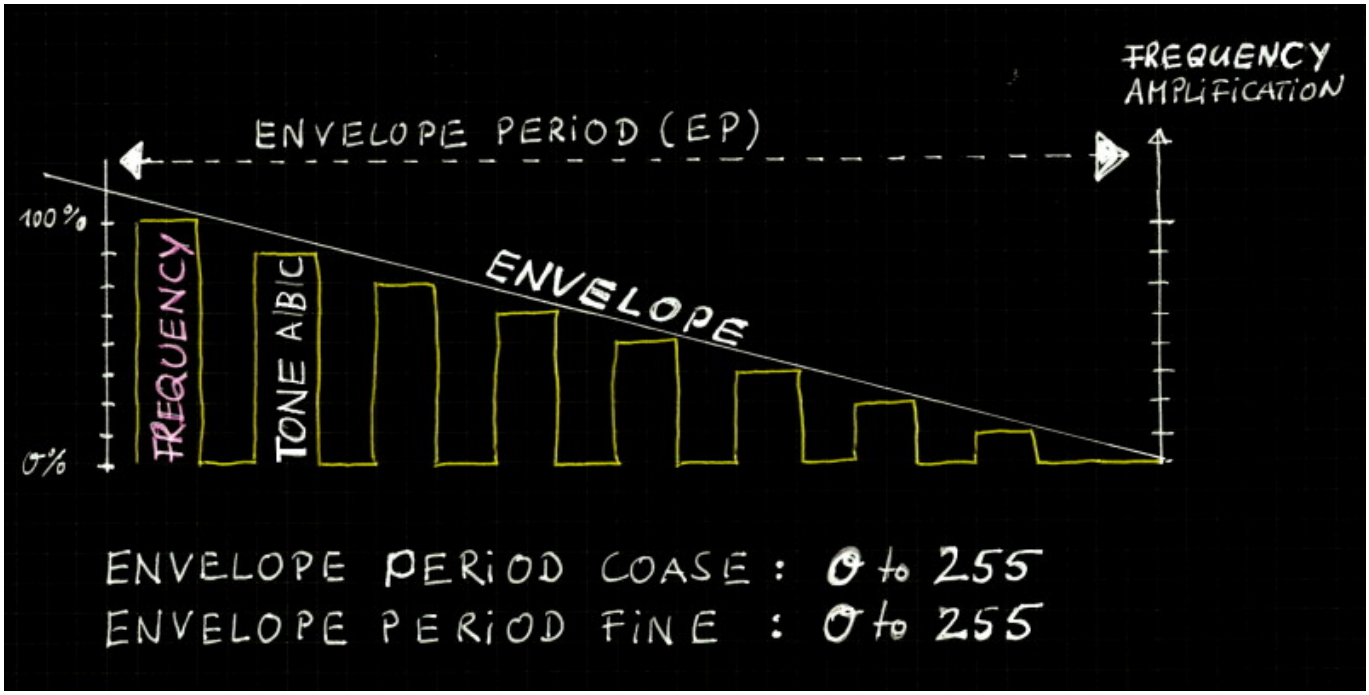


:::

::

:

**ENVELOPE SHAPE CONTROL:**

Menu item: ENV.SHAPE: [0 to 8]

- Press [+] or [-]

[1] ENVELOPE SHAPE down [2] ENVELOPE SHAPE up down [3] ENVELOPE SHAPE down continue [4] ENVELOPE SHAPE down continue2 [5] ENVELOPE SHAPE down up [6] ENVELOPE SHAPE up continue [7] ENVELOPE SHAPE up [8] ENVELOPE SHAPE up continue2

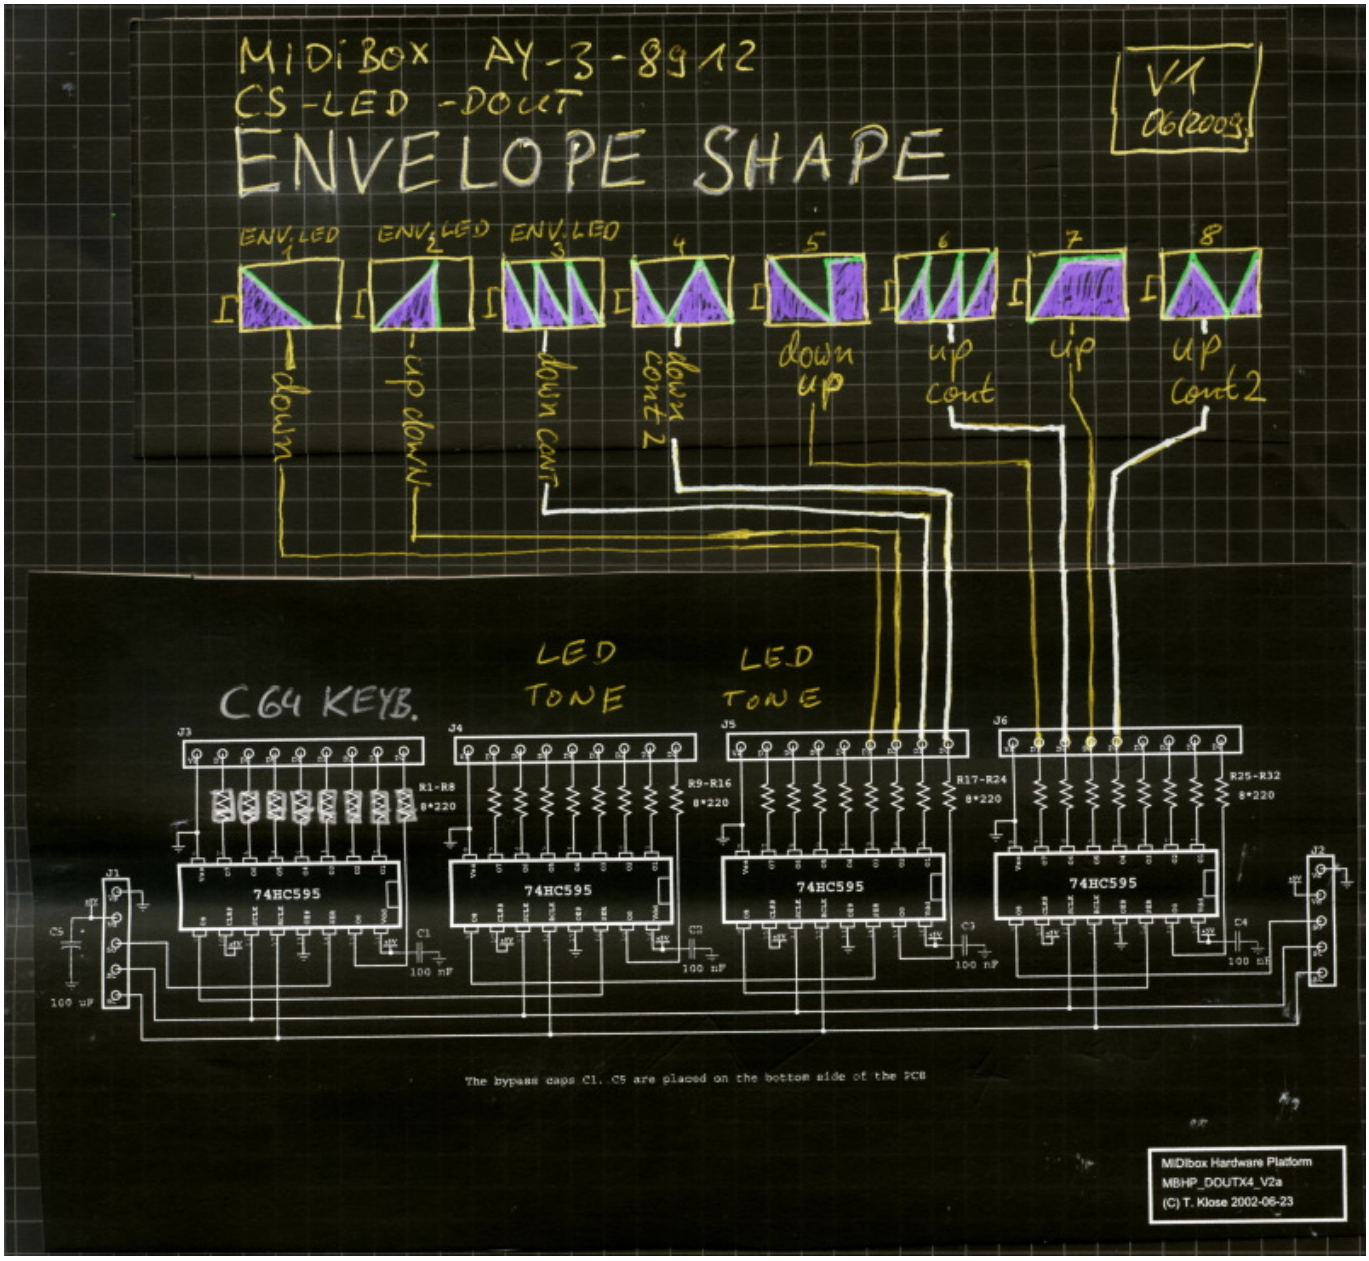


:::

::

:

[Date: 20.06.2009]

From:
https://wiki.midibox.org/ - **MIDIbox**

Permanent link:
**https://wiki.midibox.org/doku.php?id=midibox_ay_3_8912_envelope&rev=1245524990**

Last update: **2009/06/20 19:09**