2025/11/05 07:17 1/3 SEQv4+ ENC-PLATE

SEQv4+ ENC-PLATE

Eight encoders with switch functions connect to the SRIO chain on the le MEC board below. The PCB also holds Matias switches.

Note that two sets are required for a SEQv4+ build.

Schematic

The encoders are directly connected through the headers to DIN pins in the stacked PCB. The switches are connected to the matrix through diodes.

Part	DIN SR	DIN pins/column	Cathode row
EN1	1	0,1	_
EN2	1	2,3	_
EN3	1	4,5	_
EN4	1	6,7	_
EN5	3	0,1	_
EN6	3	2,3	_
EN7	3	4,5	_
EN8	3	6,7	_
SW1	2	D0	C0
SW2	2	D1	C0
SW3	2	D2	C0
SW4	2	D3	C0
SW5	2	D4	C1
SW6	2	D5	C1
SW7	2	D6	C1
SW8	2	D7	C1

BOM v1.0 placeholder

Туре	Qty	Value	Package	Parts	Mouser	Reichelt	Conrad	Other	Notes
Resis	tors			•			·		
	6	100-220R 5%	ТНТ	R1-6					
Resis	tor	network							
	1	10k	SOM16	RN1	4816P-T02-103LF				
Capa	cito	´S		•	•		·		
	3	100n	1206	C1-3					
Diod	es							-	
	19	1N4148	THT						
LEDs					·			-	

Туре	Qty	Value	Package	Parts	Mouser	Reichelt	Conrad	Other	Notes
Resis	tors						!	-	
	18	various	3mm						insert into switches
ICs									
	1	74HC165	SOIC16	IC2	595-SN74HC165DR				
	2	74HC595	SOIC16	IC1, IC3					
Enco	der								
	1	STEC12				STEC12E08			
Swite	ches				•				
	18	MEC/APEM	3FTH9	SW1-18	642-3FTH9	TASTER 3FTH9	705276 - 62		
Head	lers								
	1	1*3	male						
	2	2*5	male						
Hard	ware	•							
	6	M3 spacer	TBD						
	1	datawheel	DK-38?						
	18	switchcaps	22.5mm		642-1S11-22.5		1S11-22.5		

Versions

v1.0: first release.

Assembly


Start with the SMT parts (caps, ICs and RN), then the resistors and diodes with correct polarity. Headers, switches (read below first!), encoder, caps and knobs.

Important: insert the LEDs into the switches before soldering them! It's quite hard to bend the legs once the switches are in place. The LED legs should not interfere with the switch action; i.e. the button should be pressed and released without getting caught on the legs.

Ensure that when the switch is soldered in, the LED is correctly polarised. Round part (anode) of the LED to the circled pin; flat part (cathode) to the line:

http://wiki.midibox.org/ Printed on 2025/11/05 07:17

2025/11/05 07:17 3/3 SEQv4+ ENC-PLATE

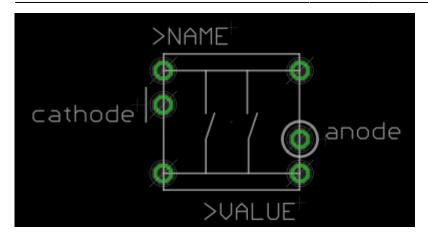

License

Currently the design is $\ \odot$ 2017 antilog devices with all rights reserved; all documentation is CC BY-NC-SA 3.0.

From

http://wiki.midibox.org/ - MIDIbox

Permanent link:

http://wiki.midibox.org/doku.php?id=seqv4plus_enc-plate&rev=1505197183

Last update: 2017/09/12 06:19

