MB SEQ functions - quick reference


Detailed info for options and functions is available at
http://www.ucapps.de/midibox_seq_manual_m.html
Print-friendly (on two A4 sheets) xls version available here mbseq_prn_.zip

#	Function	Description / Options												
Dedicated button functions *(these can vary depending on panel design and MBSEQ_HW.V4 file)*														
1	**Pattern** 1,2,3,4	Select pattern/track group - G1, G2, G3, G4												
2	**Track** 1,2,3,4	Select track within track group - T1, T2, T3, T4. 16 tracks are available in total												
3	**Trigger layer** A,B,C	Select trigger layer A or B or C. Holding C opens trigger layer selection menu and allows to select others <html>	Gate	Acc	Roll	Glide	Skip	R.G(random gate)	R.V(random value)	No FX	</html>			
4	**Parameter layer** A,B,C	Select parameter layer A and B. C switches between C & D or with *Press&Hold* open parameter layer selection menu and to select others. Four parameter layers available by default, but CC, Pitch, Prob, Delay can be added via trigger selection menu *(?)* Fix Me! <html>	Note	Vel	Length	Roll	</html>							
5	**Step View**	View and select steps if more than 16 are used <html>	1..16	17..32	...etc</html>									
6	**Pattern**	Select/load pattern/track group G1, G2, G3, G4 from SD memory location												
7	**Song**	Select song parameters <html>	Song #	Position	Action{Stop; x1..x16; Jump Pos; Jump Song; Mixer; Tempo; Mutes}		Select patterns: G1,G2,G3,G4	</html>						
8	**Edit**	Enter edit mode to edit parameter layer step values and set trigger layer steps												
9	**Mute**	Quickly mute/unmute tracks 1...16												
10	**Solo**	Solo current track												
11	**←/→** *(Left/Right)*	Move cursor position. *Left* has limited usage												
12	**+/-** *(Inc/Dec)*	Same as *Jog Dial* encoder - increases/decreases the current value												
13	**Exit**	Quickly exit to top menu												

#	Function	Description / Options												
14	**Select**	*(Press&Hold)* Select steps to be controlled by *All* function. Obviously has usage in other situations as well *(which?)* 🔧 Fix Me!												
15	**All**	Edit all selected steps set with *Select* function												
16	**Copy**	Copy steps from selected # to #. Step # can be edited by *Select* function												
17	**Paste**	Paste copied steps starting from # step. Step # can be edited by *Select* function												
18	**F1** *(Clear)*	*(Press&Hold)* Wipe selected track. Other functions can be assigned in MBSEQ_HW.V4 file												
19	**F2** *(Select track)*	*(Press&Hold)* Select track. Other functions can be assigned in MBSEQ_HW.V4 file												
20	**F3** *(Select parameter layer)*	*(Press&Hold)* Select parameter layer A,B,C,D...etc. Other functions can be assigned in MBSEQ_HW.V4 file												
21	**F4** *(Select trigger layer)*	*(Press&Hold)* Select/assign trigger layer 1..8. Other functions can be assigned in MBSEQ_HW.V4 file												
22	**Rec**	Open record menu <html>	Track #	Record{Live; Step}	Mode{Mono; Poly}	AStart{on; off}	Step #	TglGate		Port #	Chn #	</html>		
23	«	Rewind. Active only in song mode												
24	**Stop**	Stop playback and reset position to beginning												
25	**Play**	Start playback of patterns/song												
26	**Pause**	Halt/resume playback												
27	»	Forward. Active only in song mode												
28	**Metronome**	Toggle metronome on/off												
29	**Fast**	Activate *Fast* mode for quicker value selection with encoders. Speed options for *Fast* can be changed in MBSEQ_HW.V4 file												
30	**Scrub**	*(Press&Hold) + Jog Wheel* dynamically change actual position												
Menu functions														

#	Function	Description / Options														
31	**Menu+Scrub**	Toggle loop mode on/off														
32	**Menu+GP1** *(Mixer)*	Open mixer view for 16 tracks. 12 pages can be switched with +/-. An additional options available with *Select* button *More details?* Fix Me! <html>	Midi port	Midi channel	Prog change	Volume	Panorama	Reverb	Chorus	CC1	CC2	CC3	CC4	</html>		
33	**Menu+GP2** *(Event)*	Open track setup editor <html>	Track #	Type{Note; Chord; CC; Drum}	Step #	ParL #	TrgL #	Port #	Chn #	Edit Name	</html>					
34	**Menu+GP3** *(Mode)*	Open track mode editor <html>	Track #	Track on/off	Normal, Transpose, Arpeggiator	</html> <html>										

Hold{on; off} | Sort{on; off} | Restart{on; off} | Scale{on; off} | Sustain{on; off} | </html> |

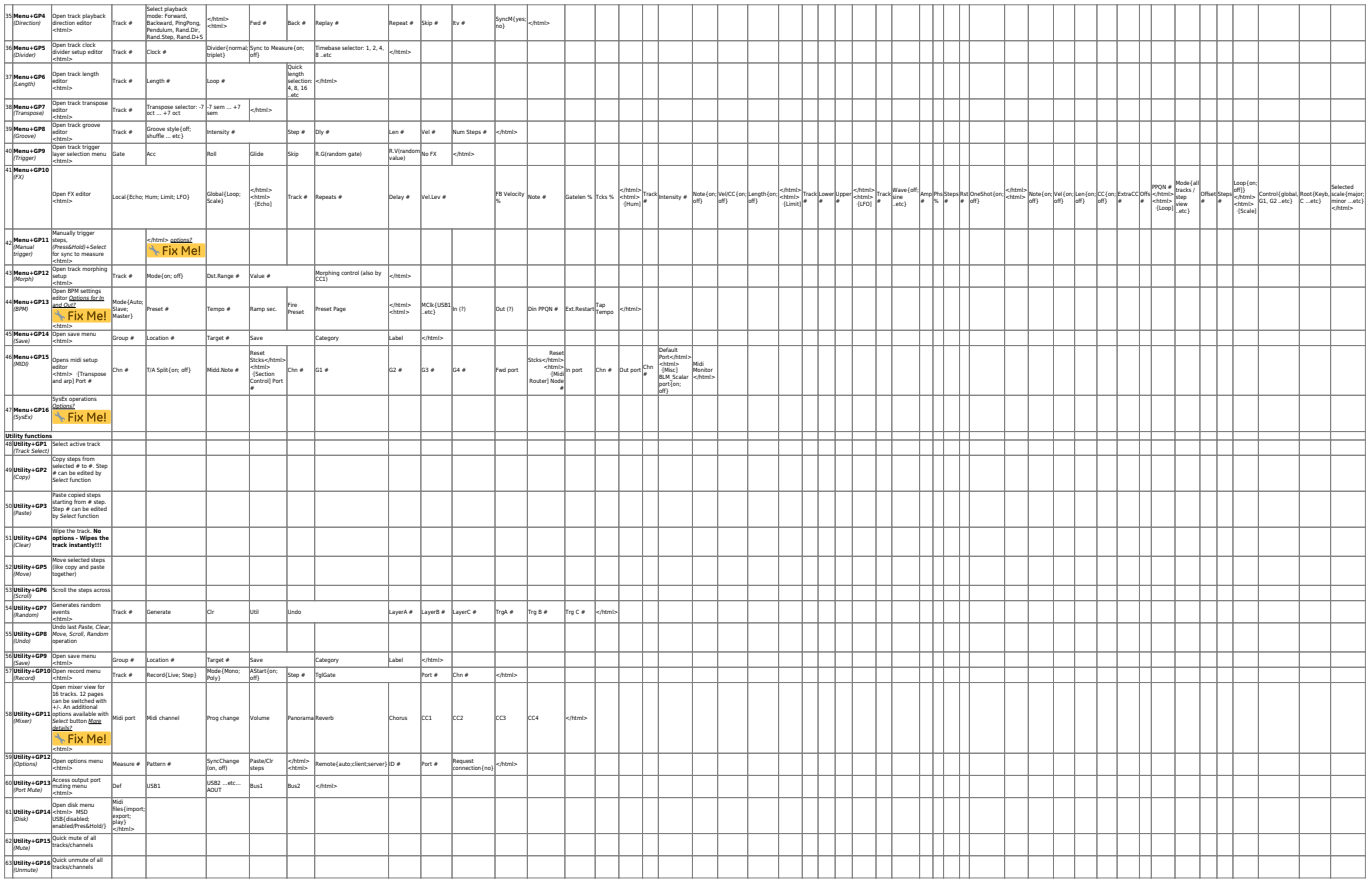

To do:

- check descriptions and options for all functions in this quick reference
- fix/complement all “fixme” issues
- add *highlight* and *fontcolor* [http://www.dokuwiki.org/plugin:fontcolor] plugins so that font/background color of the options can be changed

From:
https://wiki.midibox.org/ - **MIDIbox**

Permanent link:
https://wiki.midibox.org/doku.php?id=midibox_seq_quick_reference&rev=1273425081

Last update: **2010/05/09 17:11**